



RIELLO RTC

High Efficiency Condensing Boiler
3000–10000 MBH

POWER RANGE



RTC 3000 – RTC 6000



RTC 8000 – RTC 10000

MODEL	INPUT POWER Min-Max MBH	AHRI Thermal Efficiency %	Working Pressure Max PSI	Working Temperature Max °F	NOx Emission ppm
RTC 3000	300-3000	94%	160	195	< 30
RTC 4000	400-4000	94%	160	195	< 30
RTC 5000	500-5000	94%	160	195	< 30
RTC 6000	600-6000	94%	160	195	< 30
RTC 8000	800-8000	94%	160	195	< 30
RTC 10000	1000-10000	94%	160	195	< 30



DESIGNED FOR CONDENSATION

High-efficiency condensing boilers designed both for retrofit and new construction projects. Project costs are reduced thanks to the high water content heat exchanger, that requires no minimum flow rate and eliminates the need of a costly dedicated boiler circulator. Best quality materials used for all components guarantee high reliability and longer service life.

Condensing boiler technology is the most efficient and environmentally friendly form of fuel heating available today. Condensing technology recovers the condensation heat retained latently in flue gases, that is a part of energy that normally disappears up the chimney in other heating systems.

Thanks to lower fuel consumption and lower heating costs, condensing boilers usually pay for themselves in few years, reducing costs up to 20% in comparison with conventional heating. Additionally, a modern condensing heating system increases the value of the building as well as quality of life by reducing emissions. High efficiency condensing equipment achieves qualifying points for LEED certification of commercial buildings.

Large heat-transfer surfaces, a counter-flow heat exchanger design and cold return water temperatures together optimize condensation opportunities.

The RTC Series Condensing Boilers could be equipped with two-stage or modulating forced-draft burners and premix, that achieve extremely low pollutant emissions meeting the most stringent NOx and CO requirements.

FEATURES

Fuel options

Natural Gas, Propane, or Dual Fuel
(#2 fuel oil backup)

Full Condensing on natural gas/propane

Condensing capability on #2 fuel oil
(<15 ppm sulfur content)

Performance

Efficiency up to 98%

10:1 turndown Ratio (10%) when firing on
natural gas or propane

Pressure rating up to 160 psi

Working temperature up to 195°F

NOx Emissions capable of 30 ppm or less at all
firing rates when firing on natural gas

Capable of variable primary flow installations

Design: Structure and Materials

3-pass Fire Tube heat exchanger

High quality 316Ti stainless steel heat exchanger

Dual return water connections

Top connections for easy access to piping


One package for the jacket pack

Easy Serviceability

High performance and low installation costs

Simple piping, no primary/secondary piping
with extra circulator needed

LOOKING INSIDE: SHAPE AND MATERIALS

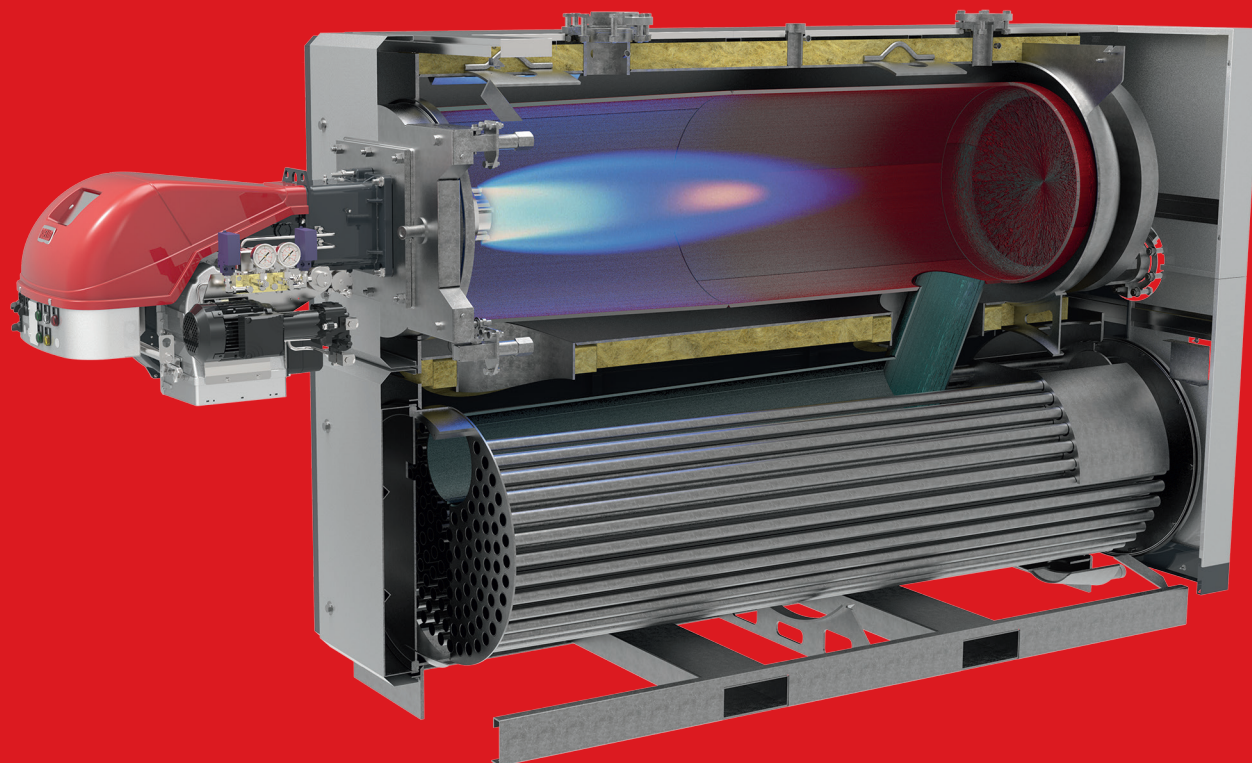

RTC 3000 – 6000

Easy installation and access to plant rooms


Top connections for easy access to piping

Double Return, low & medium temperature, to maximize condensation in all working conditions

3-pass flue high mass design


Stainless steel 316Ti for:
Combustion chamber
Inversion tube
Tube sheets

Stainless steel 316L for:
Fire Tubes

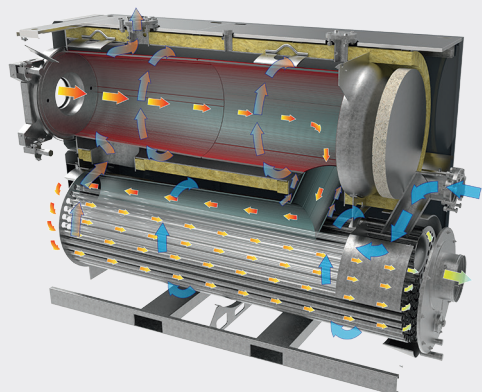

Zero flow conditions without overheating thanks to the two large diameter connections between the two cylindrical shells.

This solution allows to operate without overheating with the burner turned on and circulators turned off.

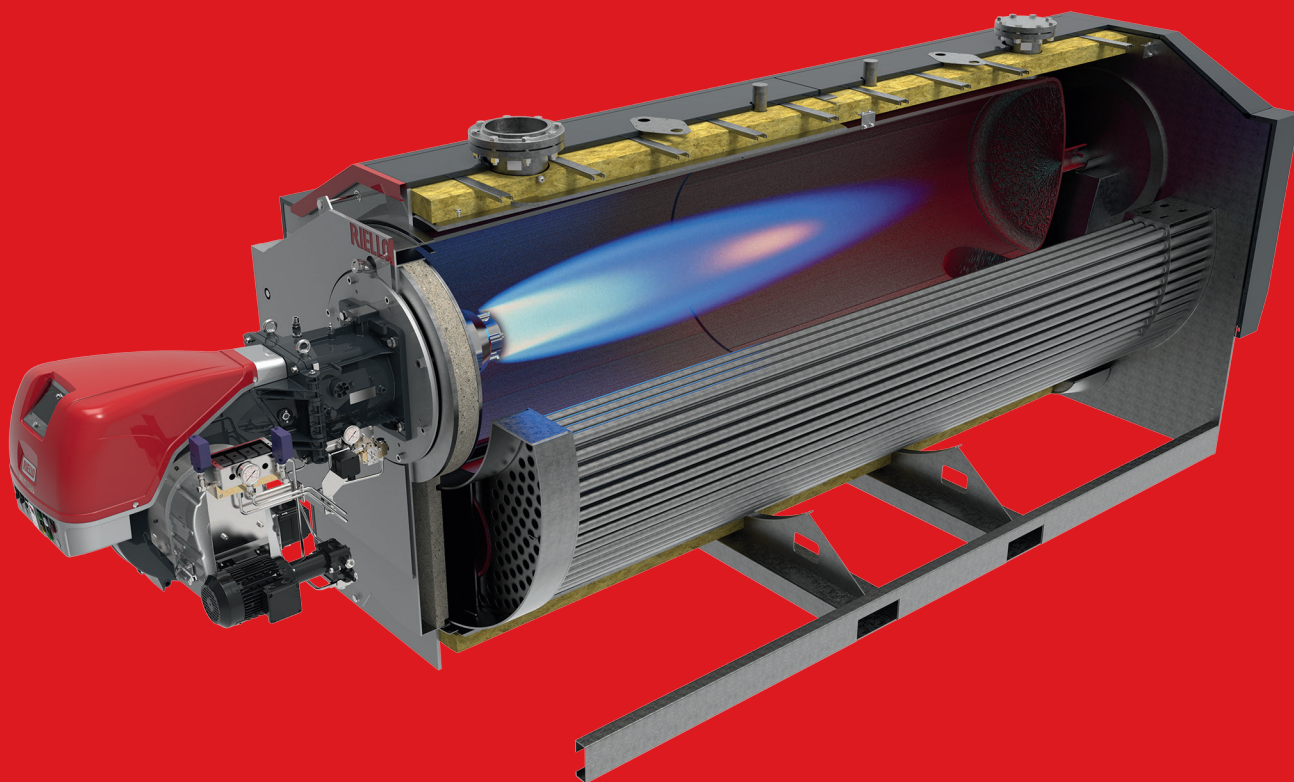

RTC 8000 – 10000

Easy installation and access to plant rooms

Top connections for easy access to piping

Double Return, low & medium temperature, to maximize condensation in all working conditions

3-pass flue high mass design

Stainless steel 316Ti for:
Combustion chamber
Inversion tube
Tube sheets

Stainless steel 316L for:
Fire Tubes



Technology made in Riello with utmost care to each detail.




The production process takes place in our centers of excellence.

All welding processes are fully automated.





BURNERS MATCHING

TYPE	MODEL	RTC 3000	RTC 4000	RTC 5000	RTC 6000	RTC 8000	RTC 10000
GAS	RS100/M	● ●	●				
	RS130/M		●	●			
	RS190/M			●	● ●		
	RS100/E	● ●	●				
	RS130/E		●	●			
	RS190/E			●	● ●		
	RS280/E				●	● ●	●
	RS300/E				●	● ●	●
	RS310/E						●
	RS400/E						●
	RS100/EV	● ●	●				
	RS130/EV		●	●			
	RS190/EV			●	● ●		
	RS280/EV	●			●	● ●	●
	RS300/EV	●	●		●	● ●	●
	RS310/EV						●
	RS400/EV						●
	RS68/E	●					
	RS120/E	● ●	●				
	RS160/E		● ●	● ●	●		
	RS68/EV	●					
DUAL FUEL	RS120/EV	● ●	●				
	RS160/EV		● ●	● ●	●		
	RLS100	● ●	●				
	RLS130		●	●			
	RLS100/M	● ●	●				
	RLS130/M		●	●			
	RLS190/M			● ●			
	RLS100/E	● ●	●				
	RLS130/E		●	●			
	RLS190/E			● ●	●		
	RLS280/E				●	● ●	●
	RLS300/E				●	● ●	●
	RLS310/E						●
	RLS400/E						●
	RLS100/EV	● ●	●				
	RLS130/EV		●	●			
	RLS190/EV			● ●	●		
	RLS280/EV				●	● ●	●
	RLS300/EV				●	● ●	●
	RLS310/EV						●
PREMIX	RLS400/EV						●
	RLS120/E	●					
	RLS160/E	●	● ●	● ●	●		
	RLS120/EV	●					
	RLS160/EV	●	● ●	● ●	●		
	RX850	●					
	RX1000	● ●	●				
PREMIX	RX1500		● ●	●			
	RX1800			● ●	●		
	RX2500				●	●	
	RX3000					● ●	●


DIMENSIONS

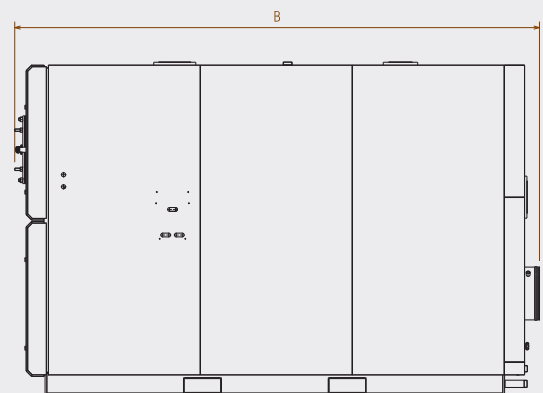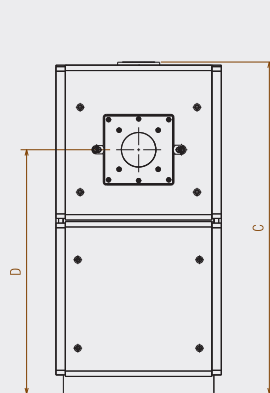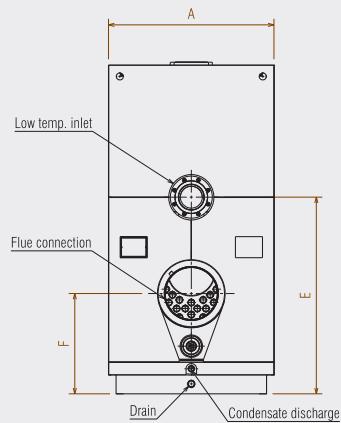

Description		RTC 3000	RTC 4000	RTC 5000	RTC 6000
A - Width	inch	39.4	41.3	43.3	46.1
	mm	1000	1050	1100	1170
B - Length	inch	119.3	127.8	137.4	145.3
	mm	3030	3245	3490	3690
C - Height	inch	79.1	82.9	86.8	92.3
	mm	2010	2106	2205	2345
D	inch	58.1	60.9	63.9	44.7
	mm	1477	1548	1622	1135
E	inch	46.9	48.7	51.5	54.7
	mm	1192	1238	1307	1390
F	inch	25.1	25.8	26.3	28.5
	mm	637	655	667	723

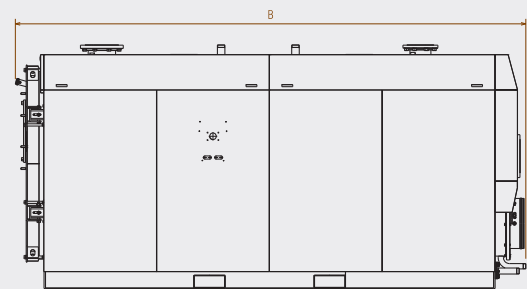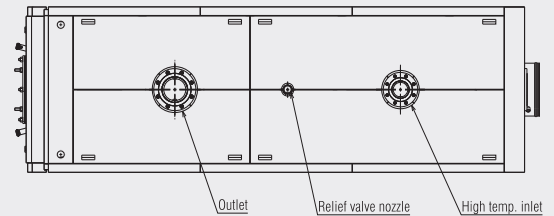

Description		RTC 8000	RTC 10000
A - Width	inch	70.9	74.8
	mm	1800	1900
B - Length	inch	161.0	178.3
	mm	4090	4530
C - Height	inch	76.8	81.7
	mm	1950	2075
D	inch	49.6	53.1
	mm	1260	1350
E	inch	41.7	45.3
	mm	1060	1150
F	inch	20.5	21.7
	mm	521	550

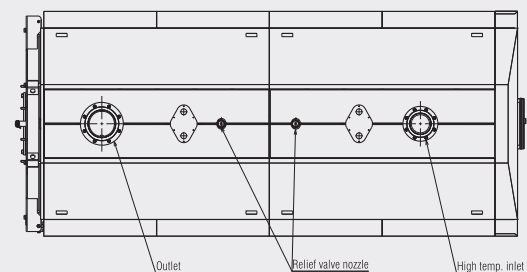

TECHNICAL SPECIFICATIONS

PO0029NA00 11/2016

	RTC 3000	RTC 4000	RTC 5000	RTC 6000	RTC 8000	RTC 10000
Boiler category	ASME Section IV					
Max allowable working pressure	160 psi					
Max allowable working temperature	195°F					
Water Connections Inlet/Outlet (Flanged)	4"	6"	6"	6"	8"	8"
High Temp. Return Water Connections	3"	3"	4"	4"	6"	6"
Min. Water Flow (GPM)	0	0	0	0	0	0
Max. Water Flow (GPM)	360	550	650	750	1150	1250
Water Volume (gal)	354	420	489	597	951	1255
Water Pressure Drop	0.7 psi at 300GPM	0.7 psi at 400GPM	0.6 psi at 500GPM	1.3 psi at 600GPM	1.1 at 800GPM	0.8 at 1000GPM
Turndown Ratio (Nat.Gas)	10:1	10:1	10:1	10:1	10:1	10:1
Venting/Air Intake Connections	10"	12"	14"	14"	16"	18"
Venting Materials	AISI 316L - AL29-4C (29% Cr - 4% Mo)					
Type of Fuel*	Natural Gas Propane Dual Fuel (#2 fuel oil backup)	Natural Gas Propane Dual Fuel (#2 fuel oil backup)	Natural Gas Propane Dual Fuel (#2 fuel oil backup)	Natural Gas Propane Dual Fuel (#2 fuel oil backup)	Natural Gas Propane Dual Fuel (#2 fuel oil backup)	Natural Gas Propane Dual Fuel (#2 fuel oil backup)
NOx Emissions <30ppm Capability on Nat. Gas	yes	yes	yes	yes	yes	yes
Temperature Control Range	80°F to 210°F					
Ambient Temperature Range	32°F to 140°F					
Standard Listings & Approvals	ASME, ETL, AHRI					
Weight (dry) lbs.	5,578	6,702	7,485	9,087	12,747	16,149
Weight (wet) lbs.	8,532	10,207	11,563	14,070	20,684	27,172
Shipping Weight lbs.	5,578	6,702	7,485	9,087	12,747	16,149

(*) Digester Gas (H₂S content < 15 ppm)
Oil (Sulphur content < 15 ppm)

RIELLO S.p.A. - 37045 Legnago (VR)
tel. +39 0442 630111 - fax +39 0442 22378

RIELLO NORTH AMERICA
35 Pound Park Road
Hingham, Massachusetts
U.S.A. 02043

2165 Meadowpine Blvd
Mississauga, Ontario
Canada L5N 6H6

www.rielloboilers.com

The manufacturer strives to continuously improve all products. appearance, dimensions, technical specifications, standard equipment and accessories are therefore liable to modification without notice.

RIELLO